





Outer dimensions (mm)

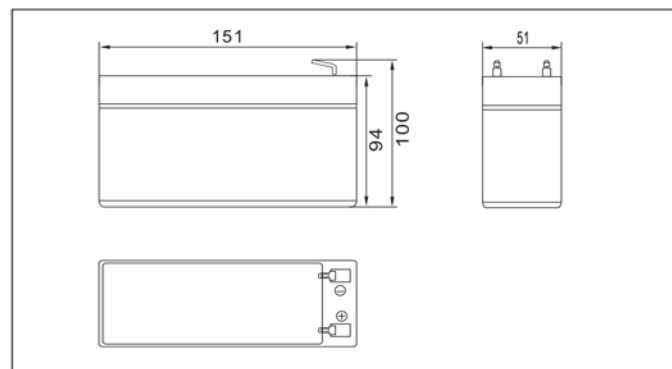

Specifications

Nominal Voltage		12V
Rated capacity (20 hour rate)		6.0Ah
Dimensions	Total Height	100mm (3.93 inches)
	Height	94mm (3.70 inches)
	Length	151mm (5.94 inches)
	Width	51mm (2.00 inches)
Weight Approx		1.75 Kg (3.85lbs)


Terminal Type (mm)

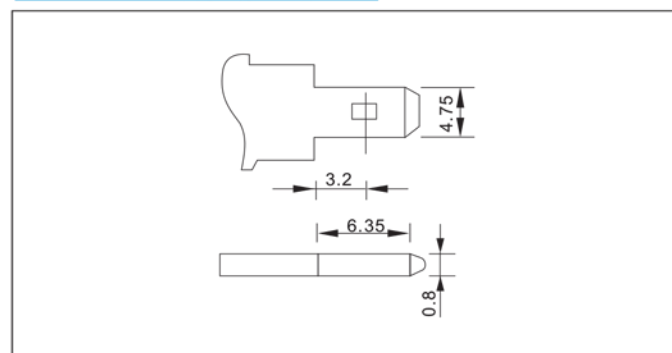

Characteristics

Capacity 25°C(77°F)	20 hour rate(275mA)	6.00AH
	10 hour rate(0.50A)	5.00AH
	5 hour rate(0.94A)	4.70AH
	1 hour rate(3.30A)	3.30AH
	1.5 hour discharge to 10.5V	2.2A
Internal Resistance Full charged Battery at 25°C(77°F)		35mΩ
Capacity affected by Temperature (20hour rate)	40°C(104°F)	102%
	25°C(77°F)	100%
	0°C(32°F)	85%
	-15°C(5°F)	65%
Self-Discharge at 25°C(77°F)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Terminal		T1
Charge (constant Voltage)	Cycle	Initial Charging Current less than 2.2A Voltage 14.40-15.00V Time 10~12h
	Float	Voltage 13.50-13.80V

Discharge Curves 25°C(77°F)

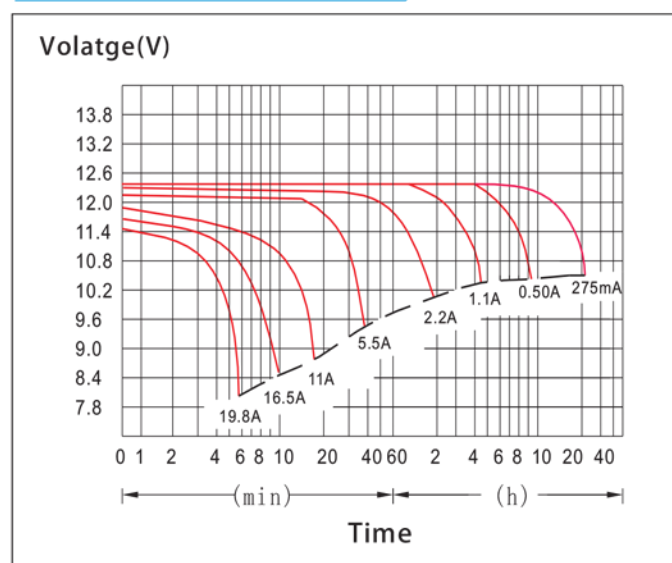

Constant Current(Amp) and Constant Power(Watt) Discharge Table at 25°C(77°F)

Time		5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	A	19.8	13.0	9.6	6.33	3.30	1.93	1.42	1.14	0.96	0.64	0.52	0.28
	W	206	139	103	68.0	35.6	21.1	15.8	12.8	11.0	7.30	6.01	3.30
10.20V	A	18.2	12.4	8.8	6.00	3.10	1.85	1.38	1.10	0.95	0.63	0.51	0.28
	W	195	139	99	67.4	35.0	21.3	15.9	12.8	11.0	7.32	6.00	3.25
10.50V	A	16.5	11.6	8.3	5.82	3.00	1.81	1.35	1.05	0.94	0.62	0.51	0.28
	W	181	132	94	67.0	34.7	21.0	15.8	12.2	11.0	7.28	5.99	3.25
10.80V	A	15.9	11.1	7.70	5.66	2.90	1.76	1.33	1.03	0.89	0.60	0.49	0.27
	W	178	128	89	65.6	33.7	20.7	15.7	12.1	10.6	7.14	5.86	3.19
11.10V	A	14.7	10.5	7.15	5.50	2.80	1.72	1.26	1.01	0.85	0.59	0.48	0.26
	W	167	121	83	64.4	32.9	20.3	15.0	12.0	10.2	7.03	5.81	3.17